



XYG-LW 系列 螺纹管接头

XYG - LW Welding fitting

SINYA



目 录

CONTENT

 04  -LW1型外螺纹接头
Hex Nipple

 04  -LW1N型外螺纹接头
Hex Nipple

 04  -LW1L型外螺纹接头
Hex Nipple

 04  -LW1NR型外螺纹转换接头
Hex Nipple NPT to BSPT

 05  -LW1NG型外螺纹转换接头
Hex Nipple NPT To BSPP

 05  -LW1NN型外螺纹变径接头
Reducing Nipple

 05  -LWAR型内外螺纹变径接头
Adapter

 06  -LWAA型内外螺纹变径接头
Adapter

 06  -LWAN型内外螺纹转换接头
Adapter

 07  -LWAG型内外螺纹转换接头
Adapter

 07  -LWAT型内外螺纹转换接头
Adapter

 07  -LWAH型内外螺纹转换接头
Gauger Adapter

 07  -LWAB型内外螺纹等径接头
Adapter NPT

 08  -LW7型内螺纹直通接头
Hex Coupling

 08  -LW7R型内螺纹直通异径接头
Hex Reducing Coupling

 08  -LWUF型内螺纹活接头
Female Union

 09  -LW8型内螺纹弯头
Elbow

 09  -LW2型外螺纹弯头
Male Elbow

 09  -LW82型内外螺纹弯头
Street Elbow

 10  -LW3F型内螺纹三通接头
Tee

 10  -LW3M型外螺纹三通接头
Male Tee

 10  -LWTMT型内外螺纹支管三通接头
Branch Tee

 10  -LWTTM型内外螺纹侧三通接头
Street Tee

 11  -LW4型内螺纹四通接头
Cross

 11  -LWC型管帽 (堵头)
Pipe Cap

 11  -LWP型外六角堵头
Pipe Plug NPT

 11  -LWPS型内六角堵头
Hollow Hex Plug

XYG-LW系列螺纹管接头



XYG — LW Welding fitting

● 特点

- 尺寸范围：1/8英寸至1英寸。
- 对有裸露螺纹的接头进行适当的包装，以免在运输及交货的过程中螺纹遭受损坏。
- 所有的管道螺纹都符合“美国机械工程师协会标准”或“美国国家标准学会标准”第B1.20.1部分（1983年版）（即：ASME/ANSI B1.20.1（1983））“中对美制锥管螺纹的要求（即：NPT标准螺纹）。
- 工作压力的计算方法符合“美国国家标准学会标准”第B31.1部分中（即：ANSI B31.1）的“动力管道规程”、“美国机械工程师协会标准”或“美国国家标准学会标准”第B31.3部分中的“精制管道规程”（即：ASME/ANSI B31.3）以及“美国机械工程师协会标准（ASME）”中“锅炉及压力容器规程”第八部分。

● 安装说明

为了确保接头的密封性，使其不会发生泄漏，新亚公司建议在所有美制锥管螺纹（即符合NPT标准的螺纹）上使用导管螺纹专用密封材料。特氟隆密封带（即聚四氟乙烯密封带）堪称其中最有效的密封材料。密封带只应在锥形管道外螺纹上使用。

在喇叭口形的管道终端、圆锥形的管终端或者管道接头的终端，请不要使用密封带！

对锥形外螺纹和锥形内螺纹都要进行清洁处理。沿着锥形外螺纹的螺旋方向缠绕密封胶带。

请注意：建议在不锈钢锥管螺纹上缠绕两圈。要确保密封胶带不会突出于第一圈螺纹之外，因为密封胶带可能会被撕成碎片，进入流体系统。

把多余的密封胶带切断。至此，连接已经准备就绪，可以进行适当的安装调整了。

● Features

- Size range from 1/8" to 1"
- Fittings are properly packaged with the exposed threads protected to ensure they are not damaged during delivery.
- All pipe threads meet the requirements of ASME/ANSI B1.20.1(1983) for tapered pipe threads (NPT).
- Working pressures calculated in accordance with Power Piping Code ANSI B31.1, Refiner Piping Code ASME/ANSI B31.3 and section VIII of ASME Boiler & Pressure Vessel Code.

● Installation Instruction

To ensure a leak-tight seal, Xinya Company recommends the use of a pipe thread sealant on all NPT threads. The most effective sealing method is teflon tape. Tape should be used only on male tapered pipe threads.

Don't use tape on flared, coned or tube fitting ends!

Clean both male and female tapered threads. Wrap tape in the direction of the male tapered thread spiral.

Note: Two wraps are suggested for stainless steel tapered pipe threads. Make sure tape does not overhang the first thread, as the tape might shred and enter the fluid system.

Cut off the excess tape. The connection is now ready for proper makeup.

● 压力额定值（磅/平方英寸） Pressure Ratings (PSI)

螺纹尺寸 NPT or BSPT/ISO Size	304、316 不锈钢 Stainless Steel		黄铜 Brass		碳钢 Carbon Steel	
	外螺纹Male	内螺纹Female	外螺纹Male	内螺纹Female	外螺纹Male	内螺纹Female
1/8	9400	6100	5000	3200	8600	5200
1/4	7500	6200	4000	3300	6900	4800
3/8	7300	5000	3900	2600	6200	4100
1/2	7200	4600	3800	2400	6000	4000
3/4	6800	4300	3600	2300	5800	3800
1	5000	4100	2600	2200	4600	3200

● 材料标准及代号 Materials & Code


代号 Code	材料 Material	棒料 Barstock	锻件 Forgings
SS	316不锈钢 SS	符合ASTM标准之A-276规范 ASTM A-276 符合ASTM标准之A-479规范 ASTM A-479	符合ASTM标准之A-182规范 ASTM A-182
B	黄铜 Brass	符合ASTM标准之B-453规范 ASTM B-453 符合ASTM标准之B-16规范 ASTM B-16	符合ASTM标准之B-283规范 ASTM B-283
S	碳钢 Carbon Steel	符合ASTM标准之A-108规范 ASTM A-108	—

● 订货方法 Order Information

示例：Example SS—
LW1NN—8—4外螺纹变径
接头Reducing Nipple




● -LW1型外螺纹接头 Hex Nipple




基本订货号 Order information	T (NPT)	L		D		D1	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW1-1	1/16	1.01	25.7	0.12	3.0	0.43	11.1
-LW1-2	1/8	1.01	25.7	0.19	4.8	0.50	12.7
-LW1-4	1/4	1.40	35.6	0.28	7.1	0.62	15.8
-LW1-6	3/8	1.43	36.3	0.38	9.6	0.75	19.1
-LW1-8	1/2	1.84	46.7	0.47	11.9	0.93	23.8
-LW1-12	3/4	1.84	46.7	0.62	15.8	1.14	29.0
-LW1-16	1	2.32	58.9	0.88	22.4	1.38	35.1

● -LW1N型外螺纹接头 Hex Nipple




基本订货号 Order information	T (NPT)	L		D		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW1N-1	1/16	1.01	25.7	0.12	3.0	0.31	7.9
-LW1N-2	1/8	1.01	25.7	0.19	4.8	0.43	11.1
-LW1N-4	1/4	1.40	35.6	0.28	7.1	0.56	14.2
-LW1N-6	3/8	1.43	36.3	0.38	9.6	0.68	17.4
-LW1N-8	1/2	1.84	46.7	0.47	11.9	0.87	22.2
-LW1N-12	3/4	1.84	46.7	0.62	15.8	1.06	27.0
-LW1N-16	1	2.32	58.9	0.88	22.4	1.38	35.1

● -LW1L型外螺纹接头 Hex Nipple



基本订货号 Order information	T (NPT)	L		D		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW1L-2	1/8	1.5-3.00	38.1-76.2	0.19	4.8	0.43	11.1
-LW1L-4	1/4	1.5-4.00	38.1-101.6	0.28	7.1	0.56	14.2
-LW1L-6	3/8	1.5-4.00	38.1-101.6	0.38	9.6	0.68	17.4
-LW1L-8	1/2	2.0-4.00	50.8-101.6	0.47	11.9	0.87	22.2
-LW1L-12	3/4	2.0-4.00	50.8-101.6	0.62	15.8	1.06	27.0
-LW1L-16	1	3.0-4.00	76.2-101.6	0.88	22.4	1.38	35.1


● -LW1NR型外螺纹转换接头 (NPT-BSPT) Hex Nipple NPT to BSPT



基本订货号 Order information	T (NPT)	T1 (BSPT)	L		D		W(六角) (HEX)	
			英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW1NR-2-R2	1/8	1/8-28	1.01	25.6	0.19	4.8	0.43	11.1
-LW1NR-4-R4	1/4	1/4-19	1.40	35.6	0.28	7.1	0.56	14.2
-LW1NR-6-R6	3/8	3/8-19	1.43	36.3	0.38	9.6	0.68	17.4
-LW1NR-8-R8	1/2	1/2-14	1.84	46.7	0.47	11.9	0.87	22.2
-LW1NR-12-R12	3/4	3/4-14	1.84	46.7	0.62	15.8	1.06	27.0
-LW1NR-16-R16	1	1-11	2.32	58.9	0.88	22.4	1.38	35.1


XYG-LW系列螺纹管接头

XYG — LW Welding fitting

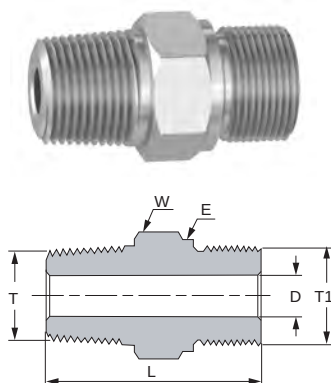


● -LW1NG型外螺纹转换接头 (NPT-BSPP) Hex Nipple NPT to BSPP

基本订货号 Order information	T	T1	L		E		D		W(六角) (HEX)	
	(NPT)	(BSPP)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW1NG-2-G2	1/8	1/8-28	1.07	27.2	0.54	13.8	0.16	4.1	0.56	14.2
-LW1NG-4-G4	1/4	1/4-19	1.44	36.3	0.71	18.0	0.23	5.8	0.75	19.0
-LW1NG-6-G6	3/8	3/8-19	1.47	37.3	0.85	21.8	0.31	7.9	0.87	22.2
-LW1NG-8-G8	1/2	1/2-14	1.78	45.2	1.02	26.0	0.47	11.9	1.06	27.0
-LW1NG-12-G12	3/4	3/4-14	1.95	49.5	1.26	32.0	0.62	15.8	1.31	33.3
-LW1NG-16-G16	1	1-11	2.26	57.4	1.53	39.0	0.78	19.8	1.62	41.2

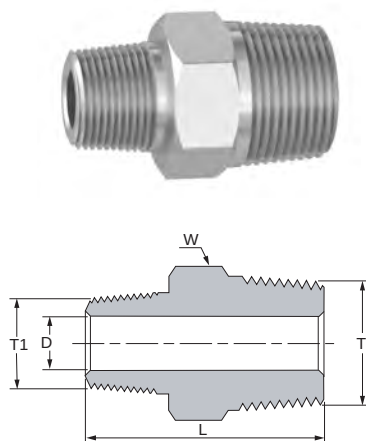

● -LW1NN型外螺纹变径接头 Reducing Nipple


基本订货号 Order information	T	T1	L		D		W(六角) (HEX)	
	(NPT)	(NPT)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW1NN-2-1	1/8	1/16	1.01	25.7	0.12	3.0	0.43	11.1
-LW1NN-4-2	1/4	1/8	1.22	31.0	0.19	4.8	0.56	14.2
-LW1NN-6-2	3/8	1/8	1.25	31.8	0.19	4.8	0.68	17.4
-LW1NN-6-4	3/8	1/4	1.43	36.3	0.28	7.1	0.68	17.4
-LW1NN-8-2	1/2	1/8	1.47	37.3	0.19	4.8	0.87	22.2
-LW1NN-8-4	1/2	1/4	1.65	41.9	0.28	7.1	0.87	22.2
-LW1NN-8-6	1/2	3/8	1.65	41.9	0.38	9.6	0.87	22.2
-LW1NN-12-4	3/4	1/4	1.65	41.9	0.28	7.1	1.06	27.0
-LW1NN-12-8	3/4	1/2	1.84	46.7	0.47	11.9	1.06	27.0
-LW1NN-16-8	1	1/2	2.13	54.1	0.47	11.9	1.38	35.1
-LW1NN-16-12	1	3/4	2.13	54.1	0.62	15.8	1.38	35.1

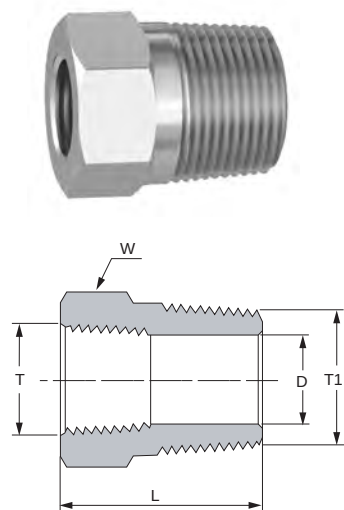

● -LWAR型内外螺纹变径接头 Adapter


基本订货号 Order information	T	T1	L		D		W(六角) (HEX)	
	(NPT)	(NPT)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWAR-2-1	1/8	1/16	1.03	26.2	0.19	4.8	0.43	11.1
-LWAR-4-2	1/4	1/8	1.06	26.9	0.28	7.1	0.56	14.2
-LWAR-6-2	3/8	1/8	0.86	21.8	0.34	8.6	0.68	17.4
-LWAR-6-4	3/8	1/4	1.19	30.2	0.37	9.5	0.75	19.0
-LWAR-8-2	1/2	1/8	1.08	27.4	0.34	8.6	0.87	22.2
-LWAR-8-4	1/2	1/4	1.08	27.4	0.45	11.4	0.87	22.2
-LWAR-8-6	1/2	3/8	1.41	35.8	0.47	11.9	0.87	22.2
-LWAR-12-4	3/4	1/4	1.08	27.4	0.45	11.4	1.06	27.0
-LWAR-12-6	3/4	3/8	1.08	27.4	0.59	15.0	1.06	27.0
-LWAR-12-8	3/4	1/2	1.63	41.4	0.62	15.7	1.06	27.0
-LWAR-16-4	1	1/4	1.37	34.8	0.45	11.4	1.38	35.1
-LWAR-16-6	1	3/8	1.37	34.8	0.59	15.0	1.38	35.1
-LWAR-16-8	1	1/2	1.37	34.8	0.73	18.5	1.38	35.1
-LWAR-16-12	1	3/4	1.85	47.0	0.88	22.4	1.38	35.1
-LWAR-20-8	1-1/4	1/2	1.46	37.1	0.73	18.5	1.75	44.4
-LWAR-20-12	1-1/4	3/4	1.47	37.3	0.94	23.9	1.75	44.4
-LWAR-20-16	1-1/4	1	1.94	49.3	1.17	29.7	1.75	44.4
-LWAR-24-8	1-1/2	1/2	1.61	40.9	0.73	18.5	2.13	54.0
-LWAR-24-12	1-1/2	3/4	1.61	40.9	0.94	23.9	2.13	54.0
-LWAR-24-16	1-1/2	1	1.61	40.9	1.17	29.7	2.13	54.0
-LWAR-24-20	1-1/2	1-1/4	2.31	58.7	1.50	38.1	2.13	54.0
-LWAR-32-8	2	1/2	1.83	46.5	0.73	18.5	2.74	70.0
-LWAR-32-12	2	3/4	1.83	46.5	0.94	23.9	2.74	70.0
-LWAR-32-16	2	1	1.83	46.5	1.17	29.7	2.74	70.0
-LWAR-32-20	2	1-1/4	1.83	46.5	1.50	38.1	2.74	70.0
-LWAR-32-24	2	1-1/2	1.83	46.5	1.73	43.9	2.74	70.0

● -LWAA型内外螺纹变径接头 Adapter

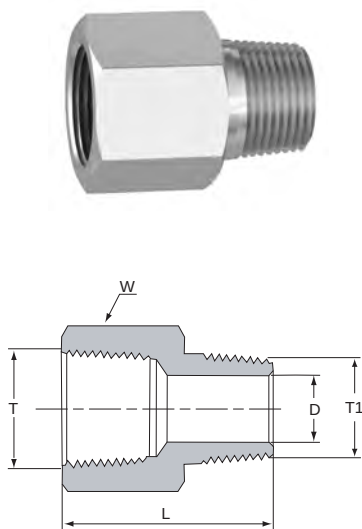

基本订货号 Order information	T	T1	L		D		W(六角) (HEX)	
	(NPT)	(NPT)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWAA-2-1	1/8	1/16	1.09	27.7	0.12	3.0	0.56	14.2
-LWAA-2-2	1/8	1/8	1.10	27.9	0.19	4.8	0.56	14.2
-LWAA-4-2	1/4	1/8	1.26	32.0	0.19	4.8	0.75	19.0
-LWAA-4-4	1/4	1/4	1.40	35.6	0.28	7.1	0.75	19.0
-LWAA-6-2	3/8	1/8	1.33	33.8	0.19	4.8	0.87	22.2
-LWAA-6-4	3/8	1/4	1.50	38.1	0.28	7.1	0.87	22.2
-LWAA-6-6	3/8	3/8	1.51	38.4	0.38	9.6	0.87	22.2
-LWAA-8-2	1/2	1/8	1.58	40.1	0.19	4.8	1.06	27.0
-LWAA-8-4	1/2	1/4	1.76	44.7	0.28	7.1	1.06	27.0
-LWAA-8-6	1/2	3/8	1.75	44.5	0.37	9.5	1.06	27.0
-LWAA-8-8	1/2	1/2	1.94	49.3	0.47	11.9	1.06	27.0
-LWAA-12-4	3/4	1/4	1.82	46.2	0.28	7.1	1.31	33.3
-LWAA-12-6	3/4	3/8	1.82	46.2	0.37	9.5	1.31	33.3
-LWAA-12-8	3/4	1/2	2.02	51.3	0.47	11.9	1.31	33.3
-LWAA-12-12	3/4	3/4	2.02	51.3	0.62	15.8	1.31	33.3
-LWAA-16-4	1	1/4	1.96	49.8	0.28	7.1	1.62	41.2
-LWAA-16-8	1	1/2	2.16	54.9	0.47	11.9	1.62	41.2
-LWAA-16-12	1	3/4	2.17	55.1	0.62	15.7	1.62	41.2
-LWAA-16-16	1	1	2.28	57.9	0.88	22.4	1.62	41.2


● -LWAN型内外螺纹转换接头 (NPT-BSPT) Adapter

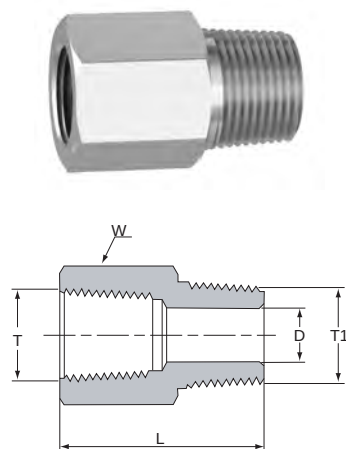

基本订货号 Order information	T	T1	L		D		W(六角) (HEX)	
	(NPT)	(BSPT)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWAN-2-R2	1/8	1/8-28	1.09	27.7	0.19	4.8	0.56	14.2
-LWAN-4-R4	1/4	1/4-19	1.42	36.1	0.28	7.1	0.75	19.0
-LWAN-6-R6	3/8	3/8-19	1.50	38.1	0.38	9.6	0.87	22.2
-LWAN-8-R8	1/2	1/2-14	1.94	49.3	0.47	11.9	1.06	27.0
-LWAN-12-R12	3/4	3/4-14	2.02	51.3	0.62	15.8	1.31	33.3
-LWAN-16-R16	1	1-11	2.30	58.4	0.88	22.4	1.62	41.2


XYG-LW系列螺纹管接头

XYG — LW Welding fitting

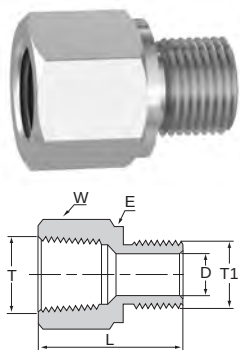


● -LWAG型内外螺纹转换接头 (NPT—BSPP) Adapter

基本订货号 Order information	T	T1	L		E		D		W(六角) (HEX)	
	(NPT)	(BSPP)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWAG-2-G2	1/8	1/8-28	0.99	25.1	0.54	13.8	0.16	4.1	0.56	14.2
-LWAG-4-G4	1/4	1/4-19	1.32	33.5	0.70	18.0	0.23	5.8	0.75	19.0
-LWAG-6-G6	3/8	3/8-19	1.41	35.8	0.85	21.8	0.31	7.9	0.87	22.2
-LWAG-8-G8	1/2	1/2-14	1.74	44.2	1.02	26.0	0.47	11.9	1.06	27.0
-LWAG-12-G12	3/4	3/4-14	1.89	48.0	1.26	32.0	0.62	15.7	1.31	33.3
-LWAG-16-G16	1	1-11	2.10	53.3	1.53	39.0	0.78	19.8	1.62	41.2

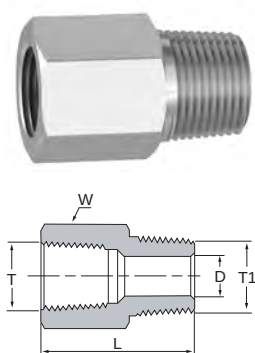


● -LWAT型内外螺纹转换接头 (BSPT—NPT) Adapter

基本订货号 Order information	T	T1	L		D		W(六角) (HEX)	
	(BSPT)	(NPT)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWAT-R2-2	1/8-28	1/8	1.06	1.06	0.16	4.1	0.56	14.2
-LWAT-R4-4	1/4-19	1/4	1.43	1.43	0.28	7.1	0.75	19.0
-LWAT-R6-6	3/8-19	3/8	1.51	1.51	0.38	9.6	0.87	22.2
-LWAT-R8-8	1/2-14	1/2	1.96	1.96	0.47	11.9	1.06	27.0
-LWAT-R12-12	3/4-14	3/4	2.00	2.00	0.62	15.7	1.31	33.3
-LWAT-R16-16	1-11	1	2.20	2.20	0.78	19.8	1.62	41.2

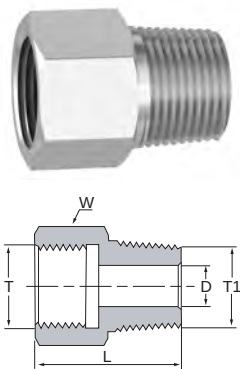

● -LWAH型内外螺纹转换接头 (BSPP—NPT) Adapter


基本订货号 Order information	T	T1	L		D		W(六角) (HEX)	
	(BSPP)	(NPT)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWAH-G2-2	1/8-28	1/8	1.06	27.0	0.16	4.1	0.56	14.2
-LWAH-G4-4	1/4-19	1/4	1.43	27.4	0.28	7.1	0.75	19.0
-LWAH-G6-6	3/8-19	3/8	1.51	32.3	0.38	9.6	0.87	22.2
-LWAH-G8-8	1/2-14	1/2	1.96	41.9	0.47	11.9	1.06	27.0
-LWAH-G12-12	3/4-14	3/4	2.00	50.8	0.62	15.7	1.31	33.3
-LWAH-G16-16	1-11	1	2.20	56.0	0.78	19.8	1.62	41.2

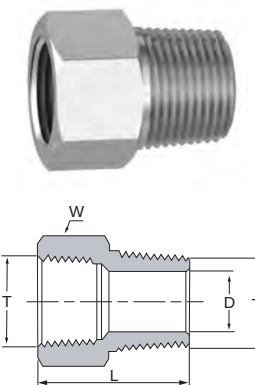

● -LWAB型内外螺纹等径接头 Adapter NPT


基本订货号 Order information	T	L		D		W(六角) (HEX)	
	(NPT)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWAB-2-2	1/8	1.09	27.7	0.19	4.8	0.56	14.2
-LWAB-4-4	1/4	1.42	36.1	0.28	7.1	0.75	19.0
-LWAB-6-6	3/8	1.50	38.1	0.38	9.6	0.87	22.2
-LWAB-8-8	1/2	1.94	49.3	0.47	11.9	1.06	27.0
-LWAB-12-12	3/4	2.02	51.3	0.62	15.8	1.31	33.3
-LWAB-16-16	1	2.30	58.4	0.88	22.4	1.62	41.2

● -LW7型内螺纹直通接头 Hex Coupling

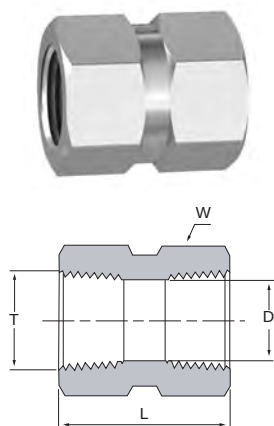


基本订货号 Order information	T (NPT)	L		D		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW7-2	1/8	0.81	20.6	0.34	8.6	0.56	14.2
-LW7-4	1/4	1.19	30.2	0.45	11.4	0.75	19.0
-LW7-6	3/8	1.31	33.3	0.59	15.0	0.87	22.2
-LW7-8	1/2	1.56	39.6	0.73	18.5	1.06	27.0
-LW7-12	3/4	1.62	41.1	0.94	23.9	1.31	33.3
-LW7-16	1	2.00	50.8	1.17	29.7	1.62	41.2

● -LW7R型内螺纹直通异径接头 Hex Reducing Coupling

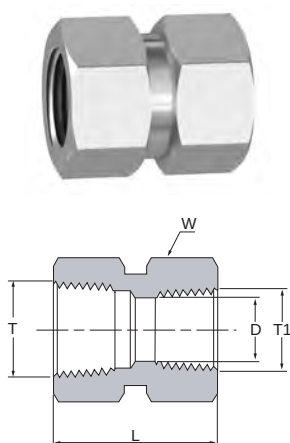

基本订货号 Order information	T (NPT)	T1 (NPT)	L		D		W(六角) (HEX)	
			英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW7R-4-2	1/4	1/8	1.22	31.0	0.34	8.6	0.75	19.0
-LW7R-6-4	3/8	1/4	1.38	35.1	0.45	11.4	0.87	22.2
-LW7R-8-2	1/2	1/8	1.56	39.6	0.34	8.6	1.06	27.0
-LW7R-8-4	1/2	1/4	1.75	44.5	0.45	11.4	1.06	27.0
-LW7R-8-6	1/2	3/8	1.78	45.2	0.59	15.0	1.06	27.0
-LW7R-12-4	3/4	1/4	1.81	46.0	0.45	11.4	1.31	33.3
-LW7R-12-8	3/4	1/2	2.06	52.3	0.73	18.5	1.31	33.3
-LW7R-16-8	1	1/2	2.19	55.6	0.73	18.5	1.62	41.2
-LW7R-16-12	1	3/4	2.25	57.2	0.94	23.9	1.62	41.2

● -LWUF型内螺纹活接头 Female Union

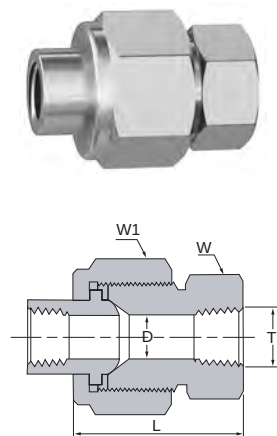


基本订货号 Order information	T (NPT)	L		D		W(六角) (HEX)		W1(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWUF-2	1/8	1.81	46.0	0.27	6.9	0.94	23.81	1.13	28.6
-LWUF-4	1/4	2.34	59.4	0.36	9.1	1.19	30.16	1.38	35.1
-LWUF-6	3/8	2.50	63.5	0.52	13.2	1.31	33.34	1.50	38.1
-LWUF-8	1/2	2.69	68.3	0.62	15.7	1.63	41.28	1.75	44.4
-LWUF-12	3/4	3.12	79.2	0.88	22.4	1.88	47.63	2.00	50.8
-LWUF-16	1	3.56	90.4	1.03	26.2	2.38	60.33	2.50	63.5

XYG-LW系列螺纹管接头


XYG —LW Welding fitting

● -LW8型内螺纹弯头 Elbow




基本订货号 Order information	T (NPT)	N		D		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW8-2	1/8	0.83	21.0	0.34	8.6	0.68	17.4
-LW8-4	1/4	0.94	24.0	0.45	11.4	0.82	20.8
-LW8-6	3/8	1.10	28.0	0.59	15.0	0.94	23.8
-LW8-8	1/2	1.18	30.0	0.73	18.5	1.06	27.0
-LW8-12	3/4	1.46	37.0	0.94	23.9	1.30	33.0
-LW8-16	1	1.55	39.0	1.17	29.7	1.50	38.0

● -LW2型外螺纹弯头 Male Elbow




基本订货号 Order information	T (NPT)	N		D		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW2-2	1/8	0.63	16.0	0.19	4.8	0.37	9.5
-LW2-4	1/4	0.83	21.0	0.28	7.1	0.56	14.2
-LW2-6	3/8	0.94	24.0	0.38	9.6	0.68	17.4
-LW2-8	1/2	1.10	28.0	0.47	11.9	0.94	23.8
-LW2-12	3/4	1.18	30.0	0.59	15.0	1.06	27.0
-LW2-16	1	1.46	37.0	0.73	18.5	1.38	35.1

● -LW82型内外螺纹弯头 Street Elbow




基本订货号 Order information	T (NPT)	T1 (NPT)	N		N1		D		W(六角) (HEX)	
			英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW82-1-1	1/16	1/16	0.86	21.8	0.88	22.4	0.12	3.10	0.37	9.5
-LW82-2-1	1/8	1/16	1.04	26.4	0.87	22.1	0.12	3.10	0.68	17.4
-LW82-2-2	1/8	1/8	1.04	26.4	0.87	22.1	0.19	4.80	0.68	17.4
-LW82-4-2	1/4	1/8	1.17	29.7	1.00	25.4	0.19	4.80	0.82	20.8
-LW82-4-4	1/4	1/4	1.17	29.7	1.17	29.7	0.28	7.10	0.82	20.8
-LW82-6-4	3/8	1/4	1.42	36.1	1.26	32.0	0.28	7.10	0.94	23.8
-LW82-6-6	3/8	3/8	1.42	36.1	1.26	32.0	0.38	9.60	0.94	23.8
-LW82-8-4	1/2	1/4	1.56	39.6	1.38	35.1	0.28	7.10	1.06	27.0
-LW82-8-6	1/2	3/8	1.56	39.6	1.38	35.1	0.38	9.60	1.06	27.0
-LW82-8-8	1/2	1/2	1.56	39.6	1.56	39.6	0.47	11.9	1.06	27.0
-LW82-12-12	3/4	3/4	1.92	48.8	1.67	42.4	0.62	15.8	1.30	33.0
-LW82-16-16	1	1	1.91	48.5	1.94	49.3	0.88	22.4	1.50	38.0

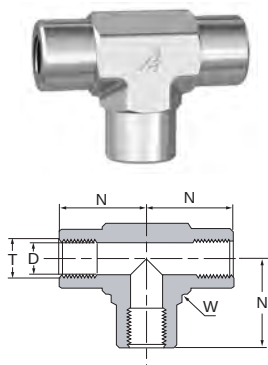


● -LW3F型内螺纹三通接头 Tee

基本订货号 Order information	T (NPT)	N		D		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW3F-2	1/8	0.83	21.0	0.34	8.6	0.68	17.4
-LW3F-4	1/4	0.94	24.0	0.45	11.4	0.82	20.8
-LW3F-6	3/8	1.10	28.0	0.59	15.0	0.94	23.8
-LW3F-8	1/2	1.18	30.0	0.73	18.5	1.06	27.0
-LW3F-12	3/4	1.46	37.0	0.94	23.9	1.30	33.0
-LW3F-16	1	1.55	39.0	1.17	29.7	1.50	38.0

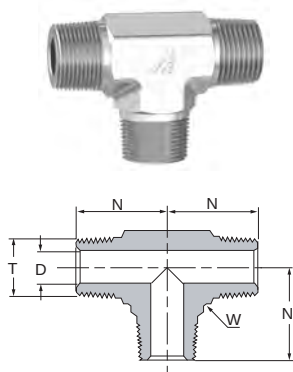


● -LW3M型外螺纹三通接头 Male Tee

基本订货号 Order information	T (NPT)	N		D		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW3M-2	1/8	0.63	16.0	0.19	4.8	0.37	9.5
-LW3M-4	1/4	0.83	21.0	0.28	7.1	0.56	14.2
-LW3M-6	3/8	0.94	24.0	0.38	9.6	0.68	17.4
-LW3M-8	1/2	1.10	28.0	0.47	11.9	0.94	23.8
-LW3M-12	3/4	1.18	30.0	0.59	15.0	1.06	27.0
-LW3M-16	1	1.46	37.0	0.73	18.5	1.38	35.1

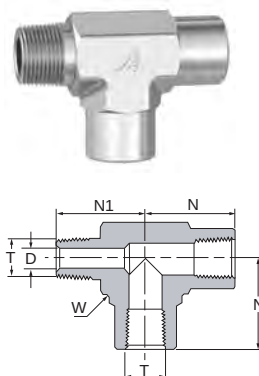

● -LWTMT型内外螺纹支管三通接头 Branch Tee

基本订货号 Order information	T (NPT)	N		N1		D		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWTMT-2	1/8	0.83	21.0	0.87	22.0	0.19	4.8	0.68	17.4
-LWTMT-4	1/4	0.94	24.0	1.02	26.0	0.28	7.1	0.82	20.8
-LWTMT-6	3/8	1.10	28.0	1.26	32.0	0.38	9.6	0.94	23.8
-LWTMT-8	1/2	1.18	30.0	1.46	37.0	0.47	11.9	1.06	27.0
-LWTMT-12	3/4	1.46	37.0	1.81	46.0	0.62	15.8	1.30	33.0
-LWTMT-16	1	1.55	39.0	1.89	48.0	0.88	22.4	1.50	38.0

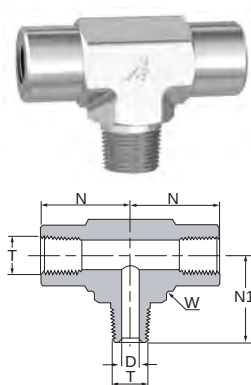


● -LWTTM型内外螺纹侧三通接头 Street Tee

基本订货号 Order information	T (NPT)	N		N1		D		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWTTM-2	1/8	0.83	21.0	0.87	22.0	0.19	4.8	0.68	17.4
-LWTTM-4	1/4	0.94	24.0	1.02	26.0	0.28	7.1	0.82	20.8
-LWTTM-6	3/8	1.10	28.0	1.26	32.0	0.38	9.6	0.94	23.8
-LWTTM-8	1/2	1.18	30.0	1.46	37.0	0.47	11.9	1.06	27.0
-LWTTM-12	3/4	1.46	37.0	1.81	46.0	0.62	15.8	1.30	33.0
-LWTTM-16	1	1.55	39.0	1.89	48.0	0.88	22.4	1.50	38.0


XYG-LW系列螺纹管接头

XYG — LW Welding fitting

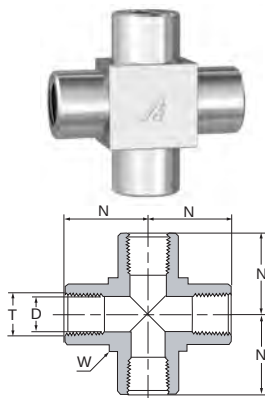


● -LW4型内螺纹四通接头 Cross

基本订货号 Order information	T (NPT)	N		D		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LW4-2	1/8	0.83	21.0	0.34	8.6	0.68	17.4
-LW4-4	1/4	0.94	24.0	0.45	11.4	0.82	20.8
-LW4-6	3/8	1.10	28.0	0.59	15.0	0.94	23.8
-LW4-8	1/2	1.18	30.0	0.73	18.5	1.06	27.0
-LW4-12	3/4	1.46	37.0	0.94	23.9	1.30	33.0
-LW4-16	1	1.55	39.0	1.17	29.7	1.50	38.0

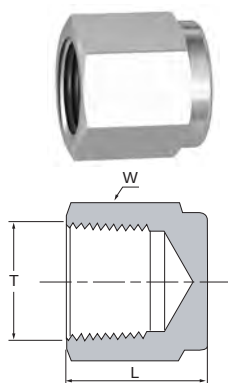


● -LWC型管帽（堵头）Pipe Cap

基本订货号 Order information	T (NPT)	L		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWC-2	1/8	0.75	19.0	0.56	14.2
-LWC-4	1/4	0.91	23.1	0.75	19.0
-LWC-6	3/8	1.03	26.2	0.87	22.2
-LWC-8	1/2	1.34	34.0	1.06	27.0
-LWC-12	3/4	1.44	36.6	1.31	33.3
-LWC-16	1	1.62	41.1	1.63	41.2

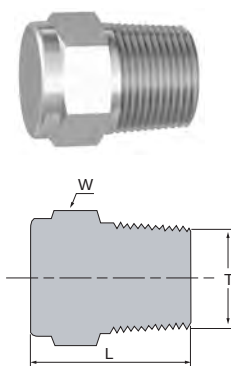

● -LWP型外六角堵头 Pipe Plug NPT

基本订货号 Order information	T (NPT)	L		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWP-1	1/16	0.75	19.0	0.31	7.9
-LWP-2	1/8	0.75	19.0	0.43	11.1
-LWP-4	1/4	0.96	24.4	0.56	14.2
-LWP-6	3/8	0.99	25.2	0.68	17.4
-LWP-8	1/2	1.21	30.7	0.87	22.2
-LWP-12	3/4	1.21	30.7	1.06	27.0
-LWP-16	1	1.50	38.1	1.38	35.1

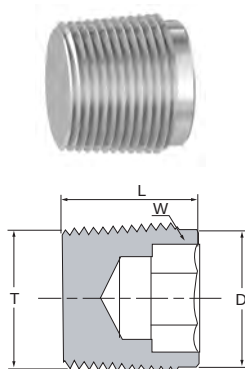

● -LWPS型内六角堵头 Hollow Hex Plug

基本订货号 Order information	T (NPT)	L		D		W(六角) (HEX)	
		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-LWPS-2	1/8	0.41	10.4	0.37	9.5	0.19	4.76
-LWPS-4	1/4	0.59	15.0	0.48	12.1	0.25	6.35
-LWPS-6	3/8	0.61	15.5	0.62	15.7	0.31	7.90
-LWPS-8	1/2	0.76	19.3	0.76	19.3	0.37	9.52
-LWPS-12	3/4	0.81	20.5	1.00	25.4	0.50	12.70
-LWPS-16	1	0.94	23.9	1.22	31.0	0.62	15.80

SINYA

港商 扬中新亚自控工程有限公司
独资 YANGZHONG SINYA AUTO-CONTROL ENGINEERING CO., LTD.

地址：江苏省扬中经济开发区兴隆港北路

Add: Xinglong Port, Yangzhong, Zhenjiang, Jiangsu, China

电话(Tel): 0511-88783806

传真(Fax): 0511-88451691

网址(Http): www.sklok.com

邮箱(E-mail): sales@sklok.com info@sklok.com