




XYG-PD 系列 平垫焊接接头

XYG - PD Welding fitting with flat washer

SINYA

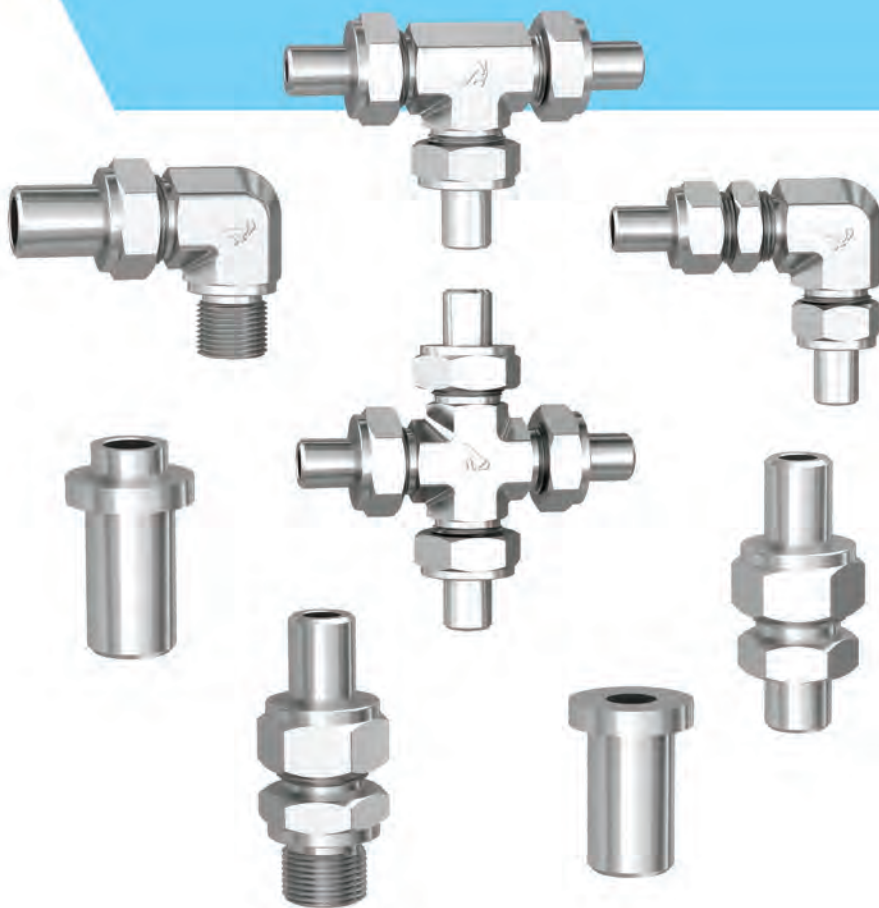

目 录

CONTENT

- 
05
● -PD1型 直通终端接头
Straight Connector
- 
05
● -PD1N型直通终端锥管接头
Straight Core Connector
- 
06
● -PD6型直通中间接头
Straight Union
- 
06
● -PD61型直通穿板接头
Straight Bulkhead
- 
07
● -PD2型弯通终端接头
Elbow Connector
- 
07
● -PD2N型弯通终端锥管接头
Elbow Core Connector

- 
08
● -PD9型弯通中间接头
Elbow Union
- 
08
● -PD62型弯通穿板接头
Elbow Bulkhead
- 
09
● -PD3型三通中间接头
Tee Union
- 
09
● -PD4型四通中间接头
Cross Union
- 
10
● -PDRG型压力表接头
Gauge Connector
- 
10
● -PDPU型螺母
Nut
- 
11
● -PDGA型接管
Tube port
- 
11
● -PDGB型接管
Tube port

XYG — PD Welding fitting with flat washer

● 特性

- ◎ 每个接头都标有规格、尺寸及商标。
- ◎ 每个接头都经过去毛刺及队除油脂处理。
- ◎ 直通接头采用优质冷拔棒料加工，弯通、三通、四通形状 的接头 体用精密热锻件加工。
- ◎ 配管规格从 $\Phi 6 \sim \Phi 50\text{mm}$ 的普通级精度无缝钢管

● Feature

Specifications, sizes and marks are marked on each connector. Each connector is all treated by burrs-removing and degreasing. Straight connector is processed with cold-rolling bar with high quality and elbow, tee and cross are processed with precise forging pieces. Tube size is from $\Phi 6$ to $\Phi 50\text{mm}$ of common seamless steel tube.

● 技术参数 Technical Data

原材料规范 Codes for Raw Materials

材料 Material	材料代码 Material Code	棒料 Bar stock	锻件 Forgings
碳钢 Carbon Steel	S	ASTM A108	A576
316不锈钢 Stainless Steel	SS	ASTM A276	ASTM A182
304不锈钢 Stainless Steel	SS2	ASTM A276	ASTM A182
304L不锈钢 Stainless Steel	SS3	ASTM A276	ASTM A182
316L不锈钢 Stainless Steel	SS4	ASTM A276	ASTM A182

备注：对于特殊材料订购时需标明，碳钢接头都经防锈处理。

Note: Please make a note when needing special materials. All carbon steel connectors are treated with anti-corrosion.

● 螺纹规范 Thread codes

螺纹名称 Thread type	螺纹代号 Thread Code	规范标准 Code & Standard
美制螺纹 American Thread	NPT	ASME B1.20.1 SAE AS71051
英制螺纹 British Thread	RT/RS/RG/BSP	ISO7/1 ISO228
公制螺纹 Metric Thread	M	ISO261 GB/T196

公制螺纹标准螺距如下：

The pitch for metric thread is shown as following:

M10 (included含) and below 以下: 1mm

M24 (included含) and below 以下: 1.5mm

M50 (included含) and below 以下: 2mm

备注：如需其它标准螺纹，订购时需标明。Note: Please make a note when needing some other kind of standard threads.

● 温度压力规范 Codes for Temperature & pressure


接头材料 Material for connectors

材料 Material	最低工作温度 Minimum Operation Temperature		最高工作温度 Maximum Operation Temperature		最低工作压力 Minimum Operation Pressure		最高工作压力 Maximum Operation Pressure	
	(°C)	(°F)	(°C)	(°F)	(psi)	(MPa)	(psi)	(MPa)
碳钢 CS	-200	-328	190	(375)	3900	(26.9)	9585	(66.1)
黄铜 Brass	-198	-324	204	(400)	1740	(12.0)	4792	(33.1)
不锈钢SS	-200	-328	537	(1000)	3900	(26.9)	9585	(66.1)


垫片及O型圈的材料 Materials for Washer and O ring

元件 Components	材料 Material	最低使用温度 Minimum Operation Temperature		最高使用温度 Maximum Operation Temperature	
		(°C)	(°F)	(°C)	(°F)
垫片 Washer	丁腈橡胶nitrile rubber	-25	-13	110	(230)
垫片 Washer	碳氟化合物fluorocarbon	-15	5	204	(400)
垫片 Washer	聚四氟乙烯polyfluortetraethylene	-65	-85	232	(450)
垫片 Washer	紫铜 Copper	-198	-324	426	(799)
O型圈 O ring	丁腈橡胶nitrile rubber	-25	-13	110	(230)
O型圈 O ring	氟橡胶fluorubber	-40	-40	232	(450)

● 结构形式 Structure

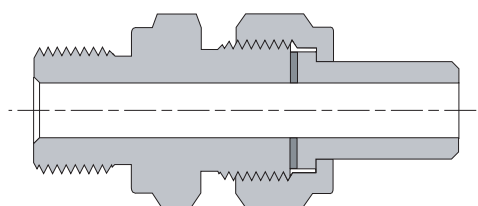

I型 Type I

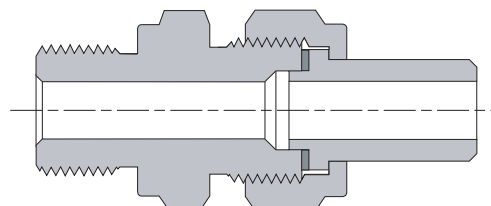

II型 Type II

● 订货号样例 Example for Order Number

代表具有以下特点的PD系列接头 Represents PD connector with the following features

SS-PDIN-12-6I

SS	PD	1N	12	6	I
316不锈钢 Stainless steel	系列代号 Serial Code	直通锥螺纹 Straight Core Thread	焊端外径Φ12mm End OD	锥管螺纹NPT3/8" Core Thread	接管形式 Tube type

代表具有以下特点的PD系列接头 Represents PD connector with the following features


S-PD3-18II

S	PD	3	18	II
碳钢 Carbon Steel	系列代号Serial Code	三通接头 Tee	焊端外径Φ18mm End OD	接管形式Tube type

XYG-PD系列平垫焊接接头


XYG — PD Welding fitting with flat washer

● -PD1型直通终端接头 Straight Connector

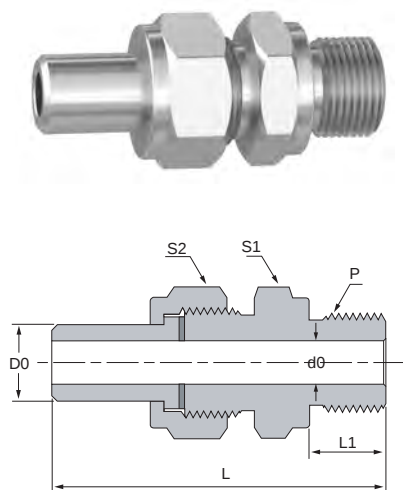


基本订货号 Order information	Do		do		P	L1		L		S1		S2	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PD1-6-M10	0.24	6	0.12	3	M10 × 1	0.35	9	1.89	48	0.55	14	0.67	17
-PD1-10-M10	0.39	10	0.24	6	M10 × 1	0.35	9	2.09	53	0.67	17	0.75	19
-PD1-10-M14	0.39	10	0.24	6	M14 × 1.5	0.47	12	2.28	58	0.75	19	0.75	19
-PD1-14-M14	0.55	14	0.31	8	M14 × 1.5	0.47	12	2.52	64	0.87	22	0.94	24
-PD1-14-M18	0.55	14	0.31	8	M18 × 1.5	0.55	14	2.68	68	0.94	24	0.94	24
-PD1-18-M18	0.71	18	0.47	12	M18 × 1.5	0.55	14	2.99	76	1.06	27	1.06	27
-PD1-18-M22	0.71	18	0.47	12	M22 × 1.5	0.55	14	2.99	76	1.06	27	1.06	27
-PD1-22-M22	0.87	22	0.59	15	M22 × 1.5	0.55	14	3.03	77	1.26	32	1.34	34
-PD1-22-M27	0.87	22	0.59	15	M27 × 2	0.63	16	3.19	81	1.34	34	1.34	34
-PD1-28-M27	1.10	28	0.79	20	M27 × 2	0.63	16	3.39	86	1.34	34	1.54	39
-PD1-28-M33	1.10	28	0.79	20	M33 × 2	0.63	16	3.39	86	1.54	39	1.54	39
-PD1-34-M33	1.34	34	0.98	25	M33 × 2	0.63	16	3.66	93	1.65	42	1.81	46
-PD1-34-M42	1.34	34	0.98	25	M42 × 2	0.71	18	3.86	98	1.81	46	1.81	46
-PD1-42-M42	1.65	42	1.26	32	M42 × 2	0.71	18	3.94	100	1.97	50	2.17	55
-PD1-42-M48	1.65	42	1.26	32	M48 × 2	0.79	20	4.06	103	2.17	55	2.17	55

● -PD1N型直通终端锥管接头 Straight Core Connector

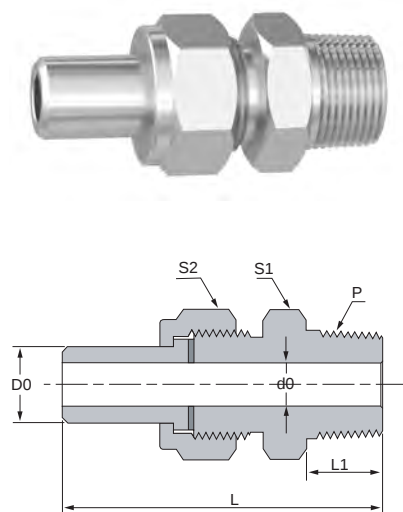


基本订货号 Order information	Do		do		P (NPT, R1)	L1		L		S1		S2	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PD1N-6-2	0.24	6	0.12	3	1/8	0.35	9	1.97	50	0.55	14	0.67	17
-PD1N-10-2	0.39	10	0.24	6	1/8	0.35	9	2.20	56	0.67	17	0.75	19
-PD1N-6-4	0.24	6	0.12	3	1/4	0.51	13	2.05	52	0.55	14	0.67	17
-PD1N-10-4	0.39	10	0.24	6	1/4	0.51	13	2.13	54	0.67	17	0.75	19
-PD1N-10-6	0.39	10	0.24	6	3/8	0.55	14	2.44	62	0.67	17	0.75	19
-PD1N-12-6	0.47	12	0.31	8	3/8	0.55	14	2.60	66	0.75	19	0.87	22
-PD1N-14-6	0.55	14	0.31	8	3/8	0.55	14	2.68	68	0.87	22	0.94	24
-PD1N-18-6	0.71	18	0.47	12	3/8	0.55	14	2.76	70	1.06	27	1.06	27
-PD1N-12-8	0.47	12	0.31	8	1/2	0.67	17	2.76	70	0.87	22	0.87	22
-PD1N-14-8	0.55	14	0.31	8	1/2	0.67	17	2.83	72	0.87	22	0.94	24
-PD1N-18-8	0.71	18	0.47	12	1/2	0.67	17	2.91	74	1.06	27	1.18	30
-PD1N-22-8	0.87	22	0.59	15	1/2	0.67	17	2.99	76	1.18	30	1.26	32
-PD1N-18-12	0.71	18	0.47	12	3/4	0.75	19	2.99	76	1.06	27	1.18	30
-PD1N-22-12	0.87	22	0.59	15	3/4	0.75	19	3.07	78	1.18	30	1.26	32
-PD1N-25-12	0.98	25	0.71	18	3/4	0.75	19	3.15	80	1.26	32	1.34	34
-PD1N-28-12	1.10	28	0.79	20	3/4	0.75	19	3.23	82	1.34	34	1.42	36
-PD1N-25-16	0.98	25	0.71	18	1	0.87	22	3.39	86	1.34	34	1.42	36
-PD1N-28-16	1.10	28	0.79	20	1	0.87	22	3.54	90	1.34	34	1.42	36
-PD1N-34-16	1.34	34	0.98	25	1	0.87	22	3.78	96	1.61	41	1.81	46
-PD1N-34-20	1.34	34	0.98	25	1 1/4	0.91	23	3.86	98	1.61	41	1.81	46
-PD1N-42-20	1.65	42	1.26	32	1 1/4	0.91	23	3.94	100	1.97	50	2.17	55
-PD1N-42-24	1.65	42	1.26	32	1 1/2	0.98	25	4.49	114	1.97	50	2.17	55

● -PD6型直通中间接头 Straight Union

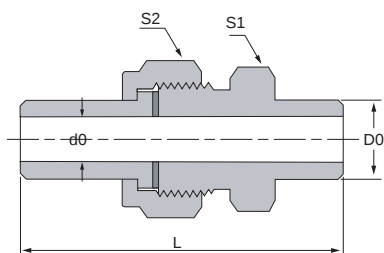

基本订货号 Order information	Do		do		L		S1		S2	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PD6-6	0.24	6	0.12	3	1.81	46	0.55	14	0.67	17
-PD6-10	0.39	10	0.24	6	2.05	52	0.67	17	0.75	19
-PD6-12	0.47	12	0.31	8	2.20	56	0.75	19	0.87	22
-PD6-14	0.55	14	0.31	8	2.36	60	0.87	22	0.94	24
-PD6-18	0.71	18	0.47	12	2.76	70	1.06	27	1.06	27
-PD6-22	0.87	22	0.59	15	2.91	74	1.18	30	1.26	32
-PD6-25	0.98	25	0.71	18	3.07	78	1.34	34	1.34	34
-PD6-28	1.10	28	0.79	20	3.23	82	1.34	34	1.42	36
-PD6-34	1.34	34	0.98	25	3.54	90	1.61	41	1.81	46
-PD6-42	1.65	42	1.26	32	3.86	98	1.97	50	2.17	55

● -PD61型直通穿板接头 Straight Bulkhead

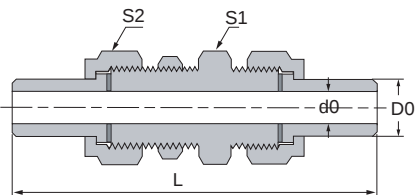


基本订货号 Order information	Do		do		L		S1		S2	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PD61-6	0.24	6	0.12	3	3.78	96	0.55	14	0.67	17
-PD61-10	0.39	10	0.24	6	3.94	100	0.67	17	0.75	19
-PD61-12	0.47	12	0.31	8	4.17	106	0.75	19	0.87	22
-PD61-14	0.55	14	0.31	8	4.41	112	0.87	22	0.94	24
-PD61-18	0.71	18	0.47	12	4.96	126	1.06	27	1.18	30
-PD61-22	0.87	22	0.59	15	5.43	138	1.18	30	1.26	32
-PD61-25	0.98	25	0.71	18	5.59	142	1.26	32	1.42	36
-PD61-28	1.10	28	0.79	20	5.91	150	1.34	34	1.54	39
-PD61-34	1.34	34	0.98	25	6.30	160	1.61	41	1.81	46
-PD61-42	1.65	42	1.26	32	7.01	178	1.97	50	2.17	55

XYG-PD系列平垫焊接接头


XYG — PD Welding fitting with flat washer

● -PD2型弯通终端接头 Elbow Connector

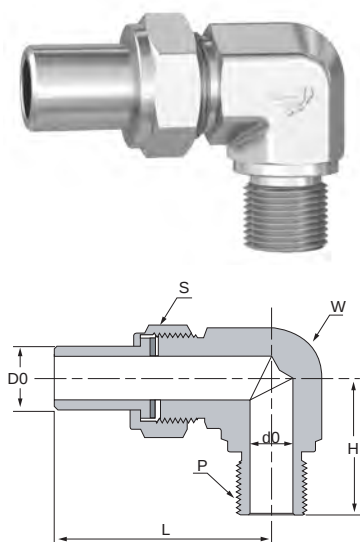


基本订货号 Order information	Do		do		P	H		L		S		W	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PD2-6-M10	0.24	6	0.12	3	M10 × 1	0.79	20	1.89	48	0.67	17	0.55	14
-PD2-10-M10	0.39	10	0.24	6	M10 × 1	0.87	22	1.97	50	0.75	19	0.67	17
-PD2-10-M14	0.39	10	0.24	6	M14 × 1.5	0.91	23	2.05	52	0.75	19	0.75	19
-PD2-14-M14	0.55	14	0.31	8	M14 × 1.5	0.98	25	2.20	56	0.94	24	0.87	22
-PD2-14-M18	0.55	14	0.31	8	M18 × 1.5	1.18	30	2.28	58	0.94	24	0.94	24
-PD2-18-M18	0.71	18	0.47	12	M18 × 1.5	1.30	33	2.60	66	1.06	27	1.06	27
-PD2-18-M22	0.71	18	0.47	12	M22 × 1.5	1.38	35	2.60	66	1.06	27	1.06	27
-PD2-22-M22	0.87	22	0.59	15	M22 × 1.5	1.50	38	2.76	70	1.34	34	1.26	32
-PD2-22-M27	0.87	22	0.59	15	M27 × 2	1.54	39	2.83	72	1.34	34	1.34	34
-PD2-28-M27	1.10	28	0.79	20	M27 × 2	1.61	41	3.15	80	1.54	39	1.34	34
-PD2-28-M33	1.10	28	0.79	20	M33 × 2	1.61	41	3.23	82	1.54	39	1.54	39
-PD2-34-M33	1.34	34	0.98	25	M33 × 2	1.69	43	3.54	90	1.81	46	1.65	42
-PD2-34-M42	1.34	34	0.98	25	M42 × 2	1.85	47	3.62	92	1.81	46	1.81	46
-PD2-42-M42	1.65	42	1.26	32	M42 × 2	1.93	49	3.94	100	2.17	55	1.97	50
-PD2-42-M48	1.65	42	1.26	32	M48 × 2	2.13	54	4.06	103	2.17	55	2.17	55

● -PD2N型弯通终端锥管接头 Elbow Core Connector

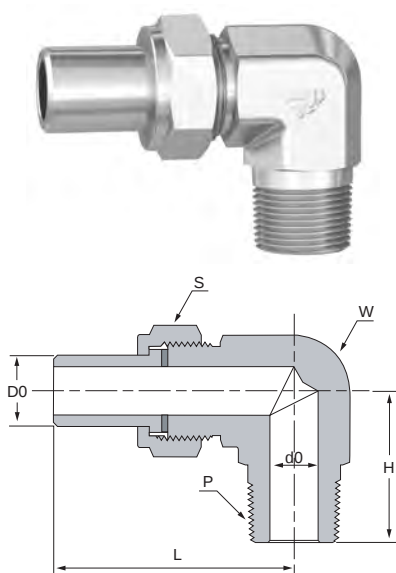


基本订货号 Order information	Do		do		P (NPT, R1)	H		L		S		W	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PD2N-6-2	0.24	6	0.12	3	1/8	0.79	20	1.89	48	0.67	17	0.55	14
-PD2N-10-2	0.39	10	0.24	6	1/8	0.87	22	1.97	50	0.75	19	0.67	17
-PD2N-6-4	0.24	6	0.12	3	1/4	0.87	22	2.05	52	0.67	17	0.55	14
-PD2N-10-4	0.39	10	0.24	6	1/4	0.91	23	2.05	52	0.75	19	0.67	17
-PD2N-10-6	0.39	10	0.24	6	3/8	0.94	24	2.20	56	0.75	19	0.67	17
-PD2N-12-6	0.47	12	0.31	8	3/8	1.02	26	2.20	56	0.87	22	0.75	19
-PD2N-14-6	0.55	14	0.31	8	3/8	1.10	28	2.28	58	0.94	24	0.87	22
-PD2N-18-6	0.71	18	0.47	12	3/8	1.18	30	2.44	62	1.06	27	1.06	27
-PD2N-12-8	0.47	12	0.31	8	1/2	1.26	32	2.68	68	0.87	22	0.87	22
-PD2N-14-8	0.55	14	0.31	8	1/2	1.34	34	2.83	72	0.94	24	0.87	22
-PD2N-18-8	0.71	18	0.47	12	1/2	1.42	36	2.99	76	1.18	30	1.06	27
-PD2N-22-8	0.87	22	0.59	15	1/2	1.50	38	2.83	72	1.26	32	1.18	30
-PD2N-18-12	0.71	18	0.47	12	3/4	1.46	37	2.91	74	1.18	30	1.06	27
-PD2N-22-12	0.87	22	0.59	15	3/4	1.57	40	2.99	76	1.26	32	1.18	30
-PD2N-25-12	0.98	25	0.71	18	3/4	1.61	41	3.07	78	1.34	34	1.26	32
-PD2N-28-12	1.10	28	0.79	20	3/4	1.65	42	3.15	80	1.42	36	1.34	34
-PD2N-25-16	0.98	25	0.71	18	1	1.65	42	3.27	83	1.42	36	1.34	34
-PD2N-28-16	1.10	28	0.79	20	1	1.69	43	3.46	88	1.42	36	1.34	34
-PD2N-34-16	1.34	34	0.98	25	1	1.69	43	3.62	92	1.81	46	1.61	41
-PD2N-34-20	1.34	34	0.98	25	1 1/4	1.89	48	3.86	98	1.81	46	1.61	41
-PD2N-42-20	1.65	42	1.26	32	1 1/4	1.93	49	4.02	102	2.17	55	1.97	50
-PD2N-42-24	1.65	42	1.26	32	1 1/2	2.01	51	4.17	106	2.17	55	1.97	50

● -PD9型弯通中间接头 Elbow Union

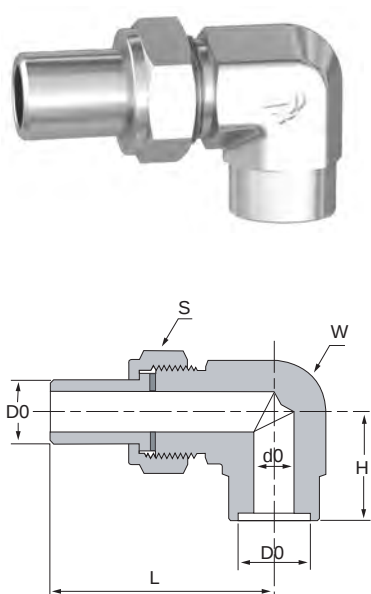

基本订货号 Order information	Do		do		H		L		S		W	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PD9-6	0.24	6	0.12	3	0.71	18	1.89	48	0.67	17	0.55	14
-PD9-10	0.39	10	0.24	6	0.87	22	1.97	50	0.75	19	0.67	17
-PD9-12	0.47	12	0.31	8	0.94	24	2.20	56	0.87	22	0.75	19
-PD9-14	0.55	14	0.31	8	1.02	26	2.28	58	0.94	24	0.87	22
-PD9-18	0.71	18	0.47	12	1.18	30	2.44	62	1.06	27	1.06	27
-PD9-22	0.87	22	0.59	15	1.34	34	2.83	72	1.26	32	1.18	30
-PD9-25	0.98	25	0.71	18	1.42	36	3.07	78	1.34	34	1.34	32
-PD9-28	1.10	28	0.79	20	1.50	38	3.15	80	1.42	36	1.34	34
-PD9-34	1.34	34	0.98	25	1.65	42	3.62	92	1.81	46	1.61	41
-PD9-42	1.65	42	1.26	32	1.89	48	4.02	102	2.17	55	1.97	50

● -PD62型弯通穿板接头 Elbow Bulkhead

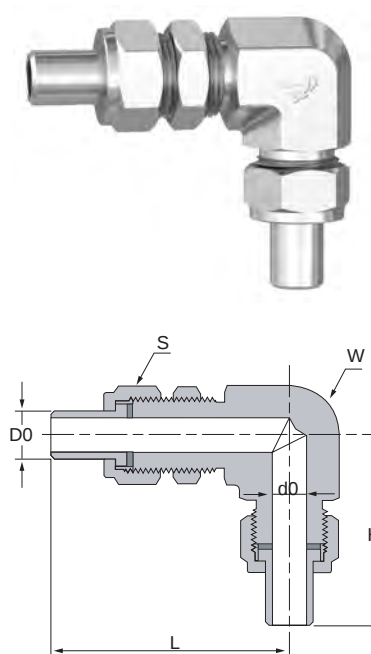


基本订货号 Order information	Do		do		H		L		S		W	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PD4-6	0.24	6	0.12	3	1.65	42	2.60	66	0.67	17	0.55	14
-PD4-10	0.39	10	0.24	6	1.97	50	2.91	74	0.75	19	0.67	17
-PD4-12	0.47	12	0.31	8	2.13	54	3.15	80	0.87	22	0.75	19
-PD4-14	0.55	14	0.31	8	2.28	58	3.39	86	0.94	24	0.87	22
-PD4-18	0.71	18	0.47	12	2.60	66	3.62	92	1.06	27	1.06	27
-PD4-22	0.87	22	0.59	15	2.76	70	3.94	100	1.26	32	1.18	30
-PD4-25	0.98	25	0.71	18	2.91	74	4.17	106	1.34	34	1.34	32
-PD4-28	1.10	28	0.79	20	3.07	78	4.33	110	1.42	36	1.34	34
-PD4-34	1.34	34	0.98	25	3.46	88	4.72	120	1.81	46	1.61	41
-PD4-42	1.65	42	1.26	32	3.86	98	5.28	134	2.17	55	1.97	50

XYG-PD系列平垫焊接接头


XYG — PD Welding fitting with flat washer

● -PD3型三通中间接头 Tee Union

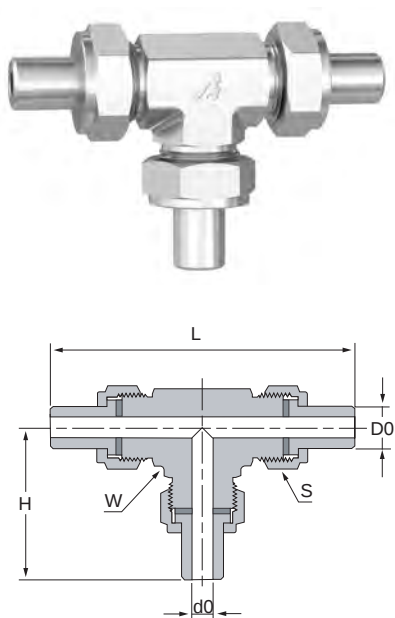


基本订货号 Order information	Do		do		H		L		S		W	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PD4-6	0.24	6	0.12	3	1.65	42	3.31	84	0.67	17	0.55	14
-PD4-10	0.39	10	0.24	6	1.97	50	3.94	100	0.75	19	0.67	17
-PD4-12	0.47	12	0.31	8	2.13	54	4.25	108	0.87	22	0.75	19
-PD4-14	0.55	14	0.31	8	2.28	58	4.57	116	0.94	24	0.87	22
-PD4-18	0.71	18	0.47	12	2.60	66	5.20	132	1.06	27	1.06	27
-PD4-22	0.87	22	0.59	15	2.76	70	5.51	140	1.26	32	1.18	30
-PD4-25	0.98	25	0.71	18	2.91	74	5.83	148	1.34	34	1.34	32
-PD4-28	1.10	28	0.79	20	3.07	78	6.14	156	1.42	36	1.34	34
-PD4-34	1.34	34	0.98	25	3.46	88	6.93	176	1.81	46	1.61	41
-PD4-42	1.65	42	1.26	32	3.86	98	7.72	196	2.17	55	1.97	50

● -PD4型四通中间接头 Cross Union

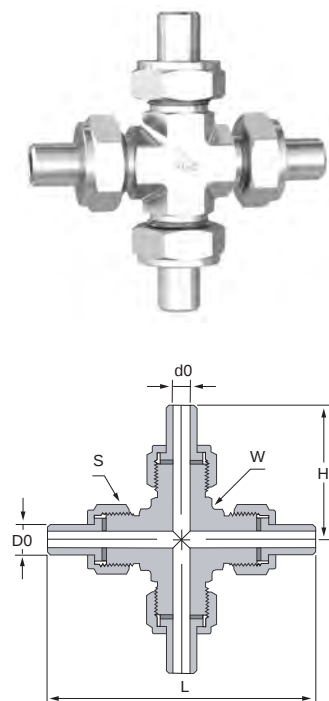


基本订货号 Order information	Do		do		H		L		S		W	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PD4-6	0.24	6	0.12	3	1.65	42	3.31	84	0.67	17	0.55	14
-PD4-10	0.39	10	0.24	6	1.97	50	3.94	100	0.75	19	0.67	17
-PD4-12	0.47	12	0.31	8	2.13	54	4.25	108	0.87	22	0.75	19
-PD4-14	0.55	14	0.31	8	2.28	58	4.57	116	0.94	24	0.87	22
-PD4-18	0.71	18	0.47	12	2.60	66	5.20	132	1.06	27	1.06	27
-PD4-22	0.87	22	0.59	15	2.76	70	5.51	140	1.26	32	1.18	30
-PD4-25	0.98	25	0.71	18	2.91	74	5.83	148	1.34	34	1.34	32
-PD4-28	1.10	28	0.79	20	3.07	78	6.14	156	1.42	36	1.34	34
-PD4-34	1.34	34	0.98	25	3.46	88	6.93	176	1.81	46	1.61	41
-PD4-42	1.65	42	1.26	32	3.86	98	7.72	196	2.17	55	1.97	50

● -PDRG型压力表接头 Gauge Connector

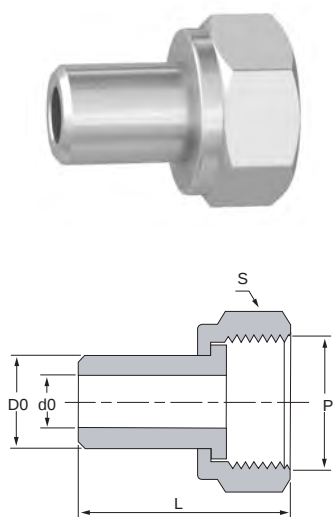

基本订货号 Order information	Do		do		P	L		S	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PDRG-6-M14	0.24	6	0.12	3	M14 × 1.5	1.10	28	0.67	17
-PDRG-10-M16	0.39	10	0.24	6	M16 × 1.5	1.26	32	0.75	19
-PDRG-12-20	0.47	12	0.31	8	M20 × 1.5	1.50	38	1.06	27
-PDRG-12-G8	0.47	12	0.31	8	G1/2	1.50	38	1.06	27
-PDRG-14-M20	0.55	14	0.31	8	M20 × 1.5	1.57	40	1.06	27
-PDRG-14-G8	0.55	14	0.31	8	G1/2	1.57	40	1.06	27

● -PDPU型螺母 Nut

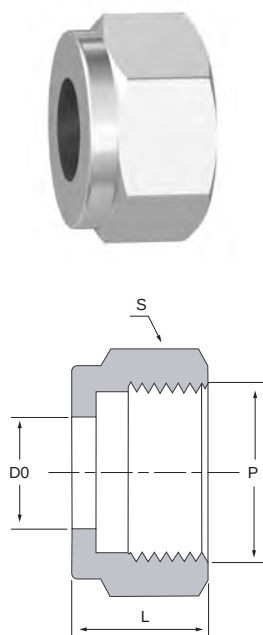


基本订货号 Order information	Do		P	L		S	
	英寸 (in)	毫米 (mm)		英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PDPU-6	0.24	6	M12 × 1.25	1.18	30	0.67	17
-PDPU-10	0.39	10	M16 × 1.5	1.34	34	0.75	19
-PDPU-12	0.47	12	M20 × 1.5	1.54	39	0.87	24
-PDPU-14	0.55	14	M22 × 1.5	1.65	42	0.94	27
-PDPU-18	0.71	18	M27 × 1.5	1.81	46	1.06	32
-PDPU-22	0.87	22	M30 × 1.5	1.97	50	1.26	36
-PDPU-25	0.98	25	M33 × 2	2.05	52	1.34	39
-PDPU-28	1.10	28	M36 × 2	2.13	54	1.42	41
-PDPU-34	1.34	34	M42 × 2	2.28	58	1.81	50
-PDPU-42	1.65	42	M52 × 2	2.44	62	2.17	60

XYG-PD系列平垫焊接接头


XYG — PD Welding fitting with flat washer

● -PDGA型接管 Tube port

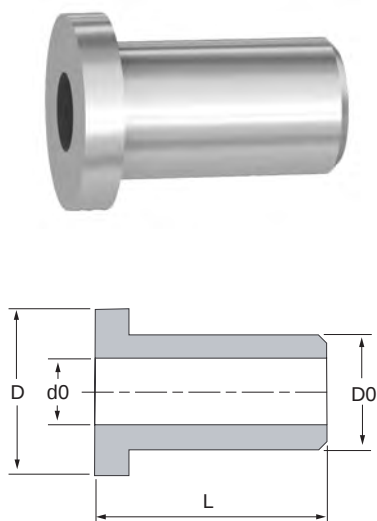

基本订货号 Order information	Do		do		D		L	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PDGA-6	0.24	6	0.12	3	0.39	10	0.79	20
-PDGA-10	0.39	10	0.24	6	0.55	14	0.94	24
-PDGA-12	0.47	12	0.31	8	0.71	18	1.02	26
-PDGA-14	0.55	14	0.31	8	0.79	20	1.10	28
-PDGA-18	0.71	18	0.47	12	0.94	24	1.26	32
-PDGA-22	0.87	22	0.59	15	1.06	27	1.26	32
-PDGA-25	0.98	25	0.71	18	1.18	30	1.38	35
-PDGA-28	1.10	28	0.79	20	1.30	33	1.38	35
-PDGA-34	1.34	34	0.98	25	1.54	39	1.50	38
-PDGA-42	1.65	42	1.26	32	1.93	49	1.57	40

● -PDGB型接管 Tube port

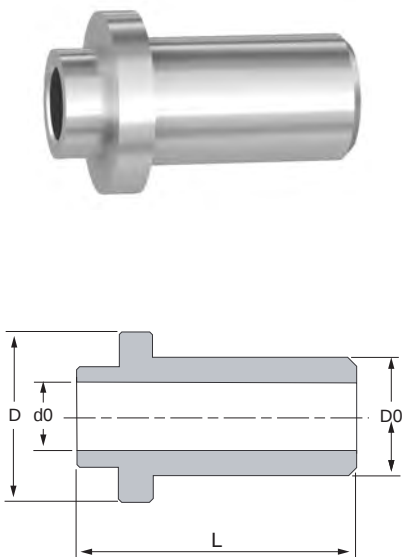

基本订货号 Order information	Do		do		D		L	
	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)	英寸 (in)	毫米 (mm)
-PDGB-6	0.24	6	0.12	3	0.39	10	0.98	25
-PDGB-10	0.39	10	0.24	6	0.55	14	1.14	29
-PDGB-12	0.47	12	0.31	8	0.71	18	1.26	32
-PDGB-14	0.55	14	0.31	8	0.79	20	1.30	33
-PDGB-18	0.71	18	0.47	12	0.94	24	1.46	37
-PDGB-22	0.87	22	0.59	15	1.06	27	1.50	38
-PDGB-25	0.98	25	0.71	18	1.18	30	1.57	40
-PDGB-28	1.10	28	0.79	20	1.30	33	1.61	41
-PDGB-34	1.34	34	0.98	25	1.54	39	1.73	44
-PDGB-42	1.65	42	1.26	32	1.93	49	1.81	46

SINYA

港商 扬中新亚自控工程有限公司
独资 YANGZHONG SINYA AUTO-CONTROL ENGINEERING CO., LTD.

地址：江苏省扬中经济开发区兴隆港北路

Add: Xinglong Port, Yangzhong, Zhenjiang, Jiangsu, China

电话(Tel): 0511-88783806

传真(Fax): 0511-88451691

网址(Http): www.sklok.com

邮箱(E-mail): sales@sklok.com info@sklok.com